



	NAME/MANUFACTURER/COMPUTER	LOCATION	COUNTRY	CORES	R _{max} P/flop/s
1	Tianhe-1A NUDT 6-core Intel X5670 2.93 GHz + Nvidia M2050 GPU w/custom interconnect	NUDT/NSCC/Tianjin	China	186,368	2.57
2	Jaguar Cray XT-5 6-core AMD 2.6 GHz w/custom interconnect	DOE/SC/ORNL	USA	224,162	1.76
3	Nebulae Dawning TC3600 Blade Intel X5650 2.67 GHz, NVidia Tesla C2050 GPU w/ Iband	NSCS	China	120,640	1.27
4	Tsubame 2.0 HP Proliant SL390s G7 nodes (Xeon X5670 2.93GHz), NVIDIA Tesla M2050 GPU w/Iband	TiTech	Japan	73,278	1.19
5	Hopper Cray XE-6 12-core AMD 2.1 GHz w/custom interconnect	DOE/SC/LBNL	USA	153,408	1.05

PERFORMANCE DEVELOPMENT

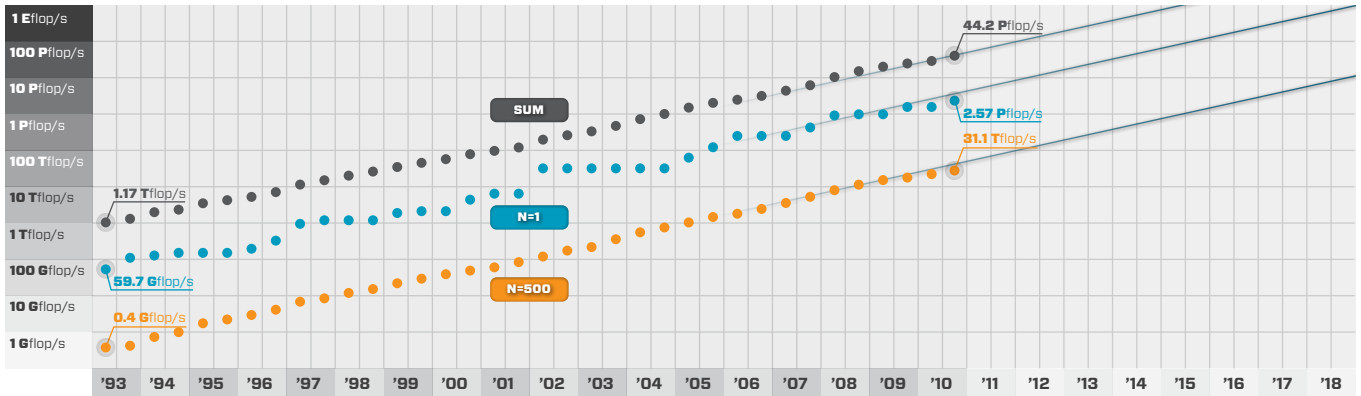


PROJECTED


ARCHITECTURES

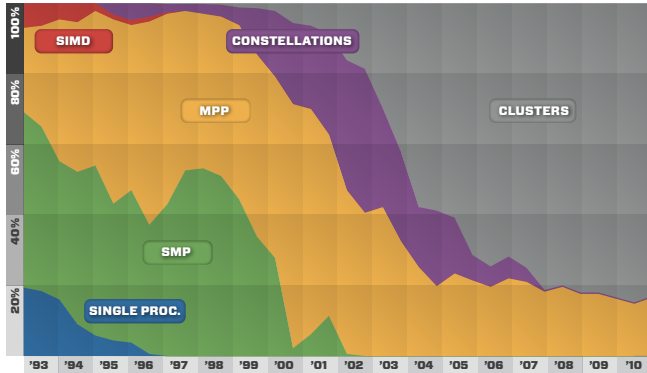

CHIP TECHNOLOGY

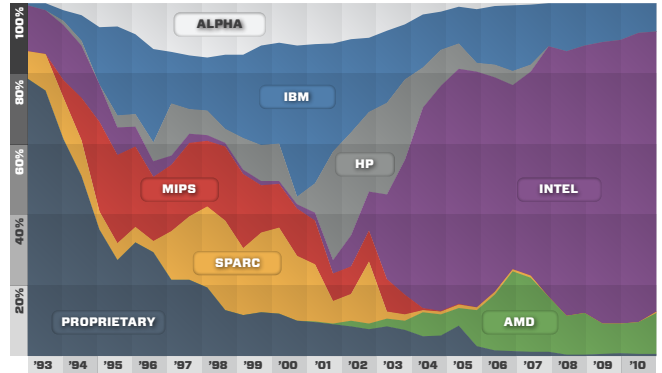

INSTALLATION TYPE

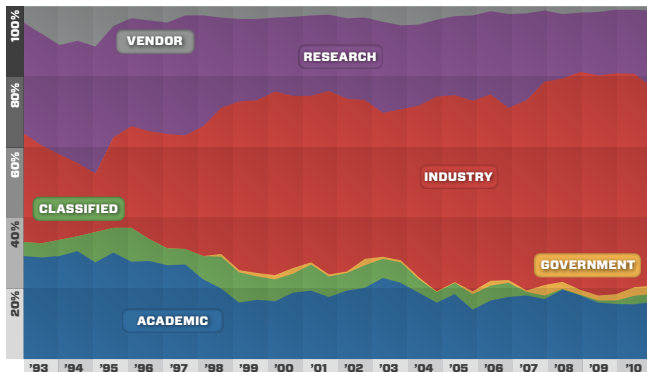

HPLINPACK

A Portable Implementation of the High Performance Linpack Benchmark for Distributed Memory Computers

- Algorithm: recursive panel factorizations, multiple lookahead depths, bandwidth reducing swapping
- Easy to install, only needs MPI + BLAS or VSIPL
- Highly scalable and efficient from the smallest cluster to the largest supercomputers in the world