
COSC 462


Parallel Sorting

Piotr Luszczek

Sequential Sorting: Two Examples

- Quicksort
 - $\Theta(N \log N)$
 - Fast in practice
 - Unstable
 - Data with identical keys might end up in a different order
 - Many applications require those data to retain their order
 - Sensitive to median selection
 - Worst case complexity is quadratic
- Heap sort
 - $\Theta(N \log N)$
 - Slower in practice
 - Building and maintaining virtual tree of data
 - Stable
 - Worst case complexity is the same as the average case

Naive Parallel Sort (Don't Use!)

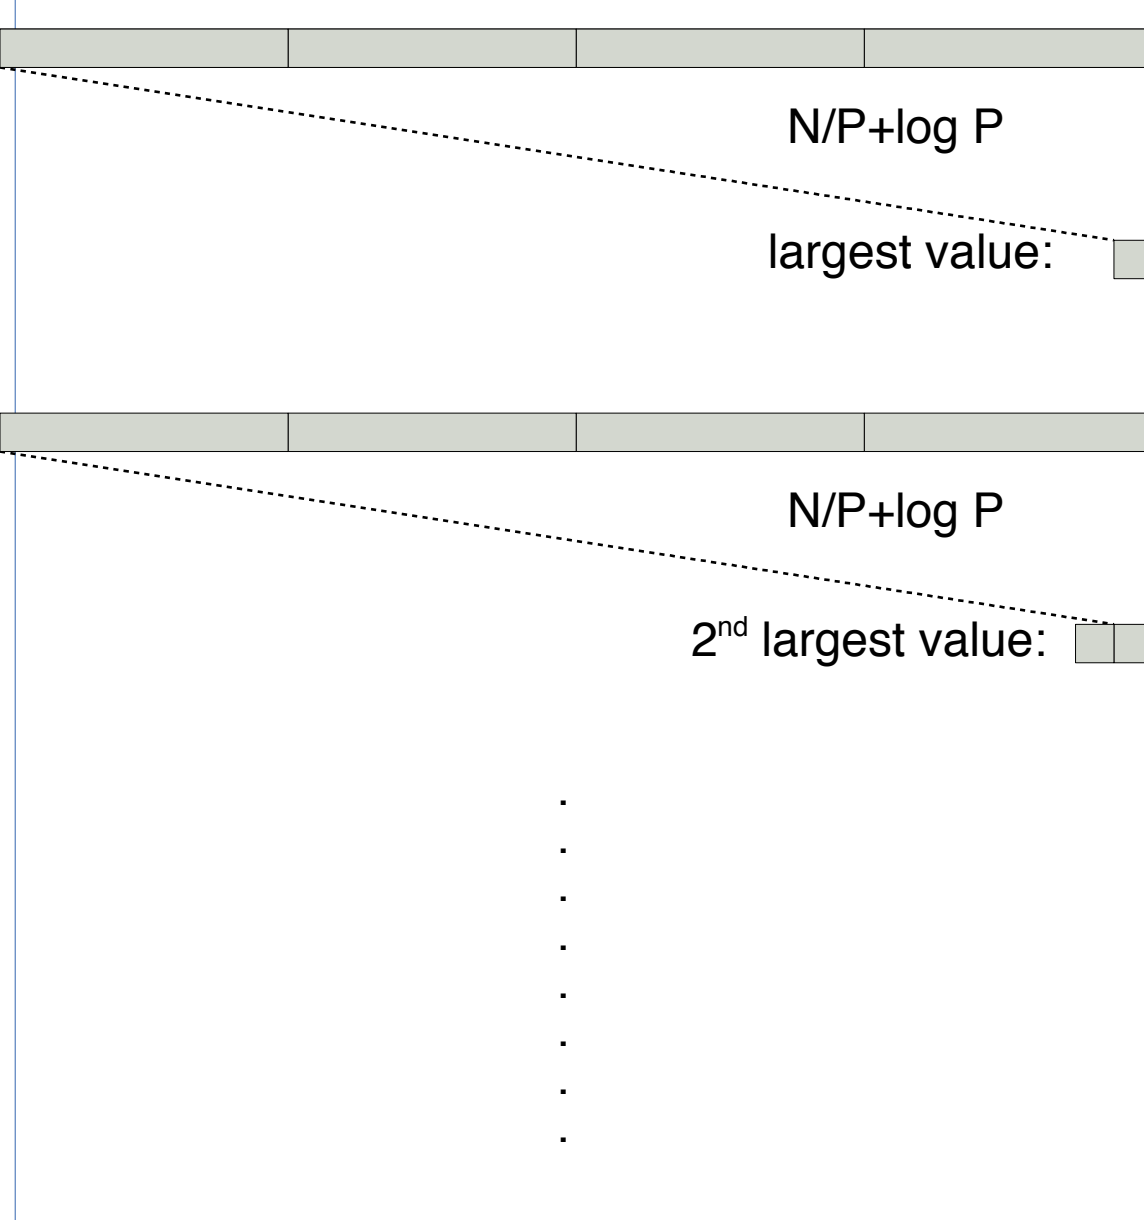


Repeat for each of N elements

- Complexity
 - $(N/P + \log P) * N = N^2/P + N \log P$
- Very simple implementation:

```
for (e = 0; e < N; ++e)
    MPI_Reduce(..., MPI_MAX)
```

Improved Naive Parallel Sort

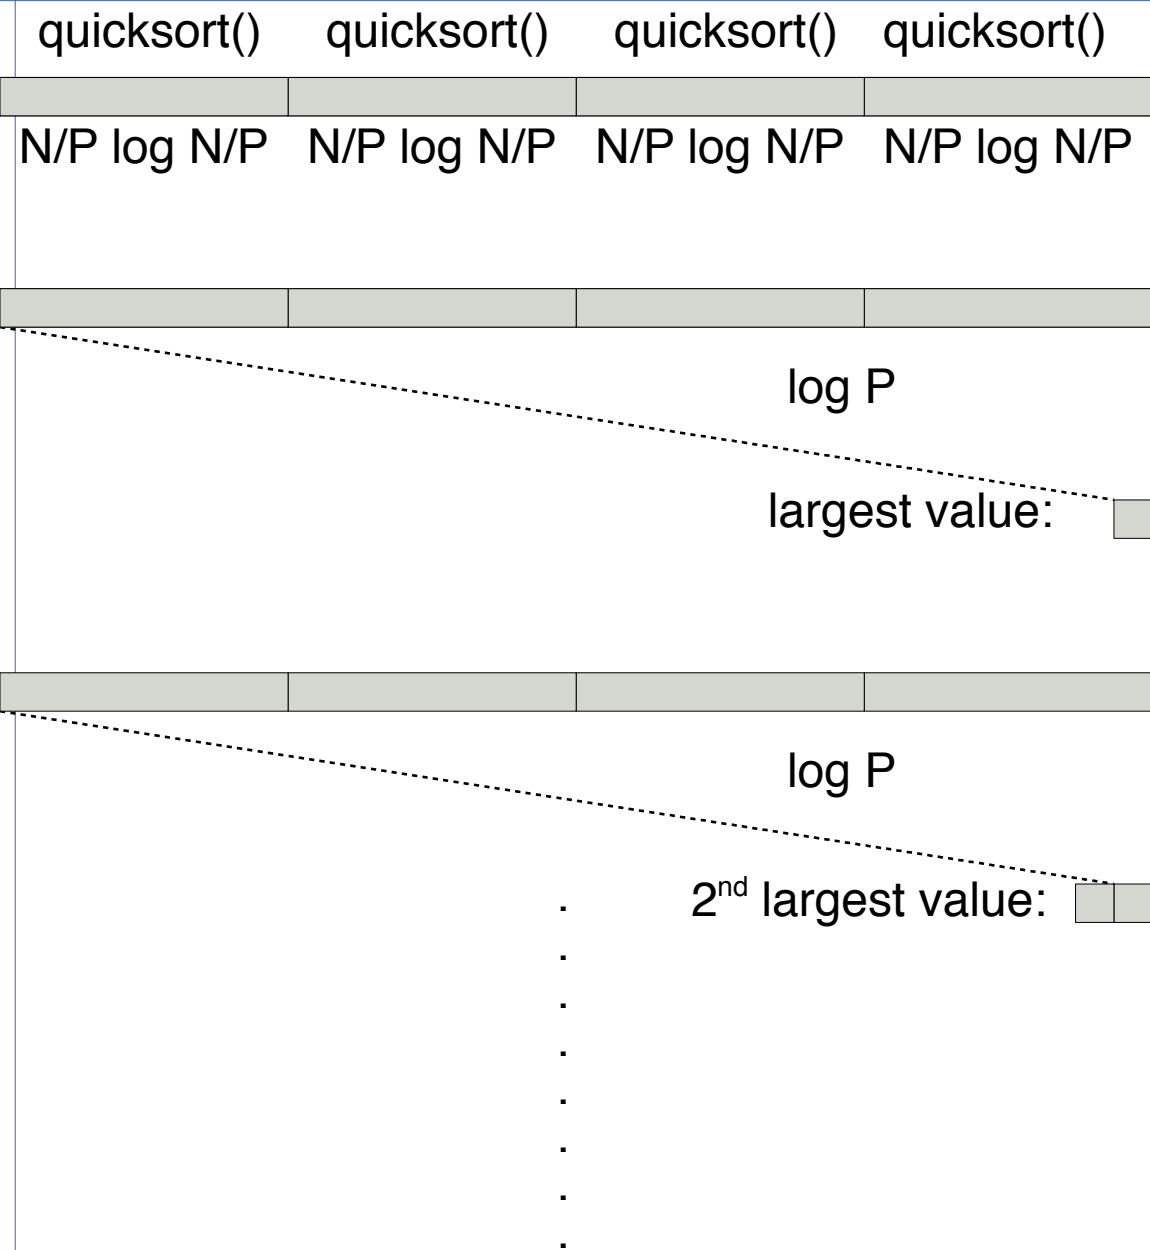


Repeat for each of N elements

- Complexity
 - $N/P \log N/P + (\log P) * N = N/P \log N/P + N \log P$
- Very simple implementation:


```
quicksort();  
for (e = 0; e < N; ++e)  
    MPI_Reduce(..., MPI_MAX)
```

Main Problem with Naive Implementations

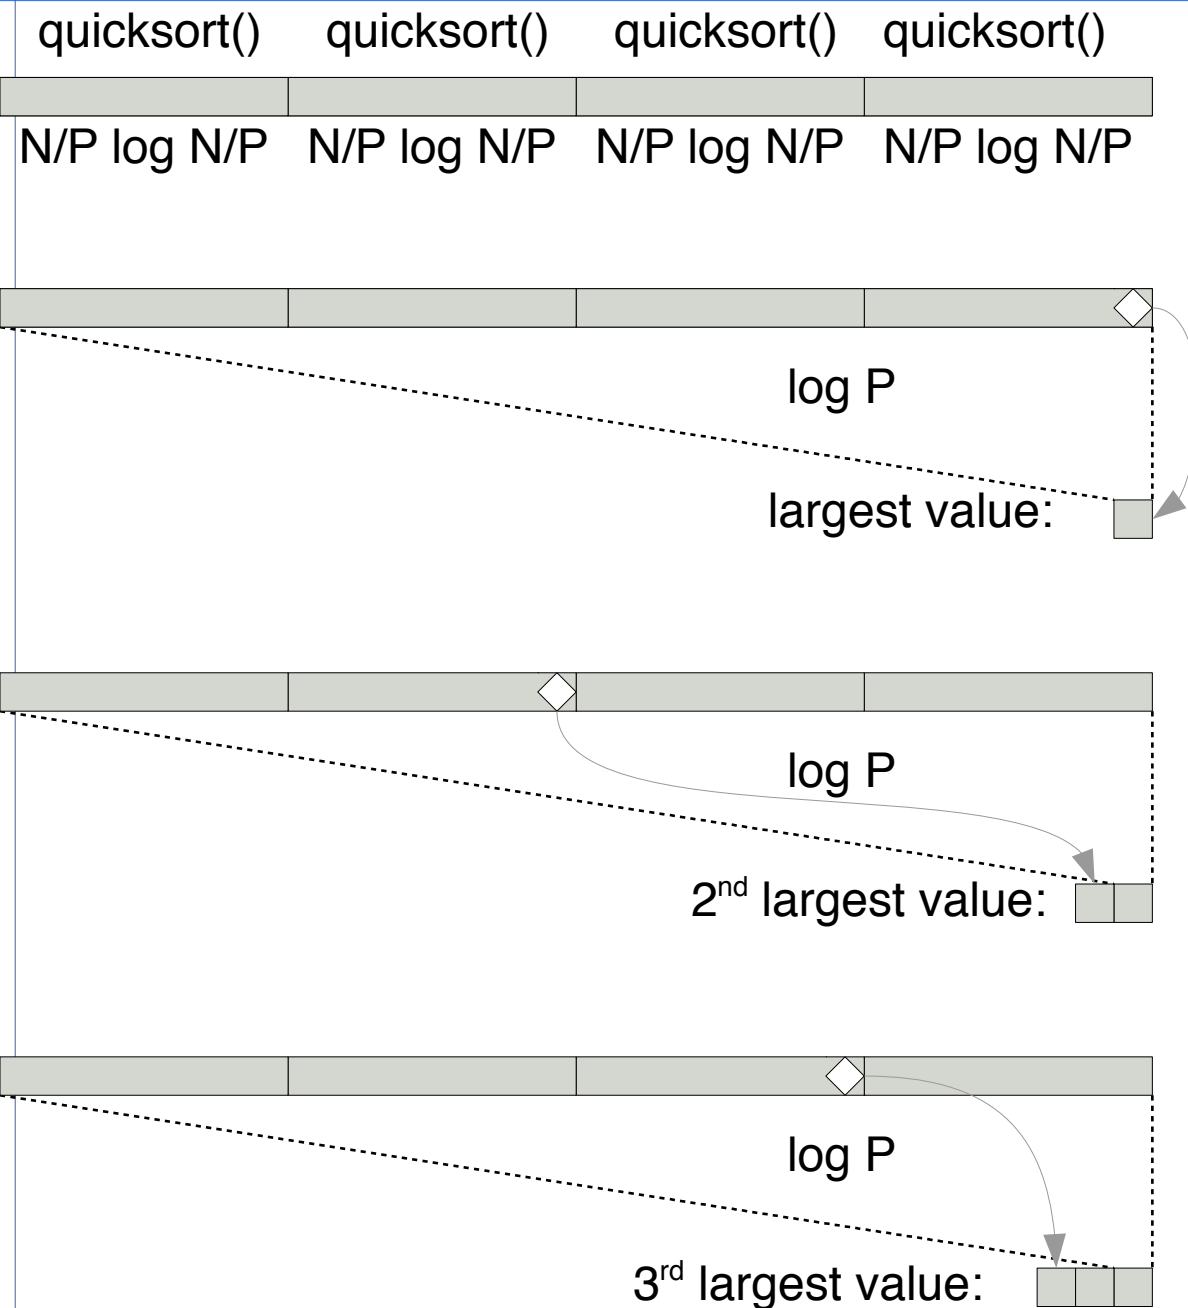


- We must keep track of location of the largest element:
`MPI_Reduce(..., MPI_MAXLOC)`
- We must keep track of number of local elements:
`MPI_Reduce(..., local[lastEl])`
- We must keep track of where the value should go:
`MPI_Reduce(currentRoot, ...)`
- All processes need to know the the location:
`MPI_Bcast(currentRoot, &maxloc)`

Towards Better Parallel Sort

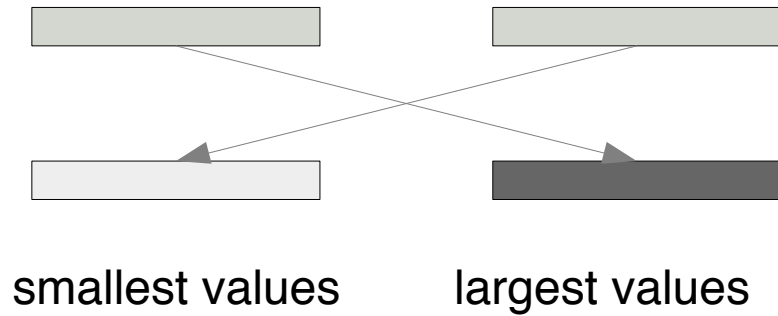


2 processes

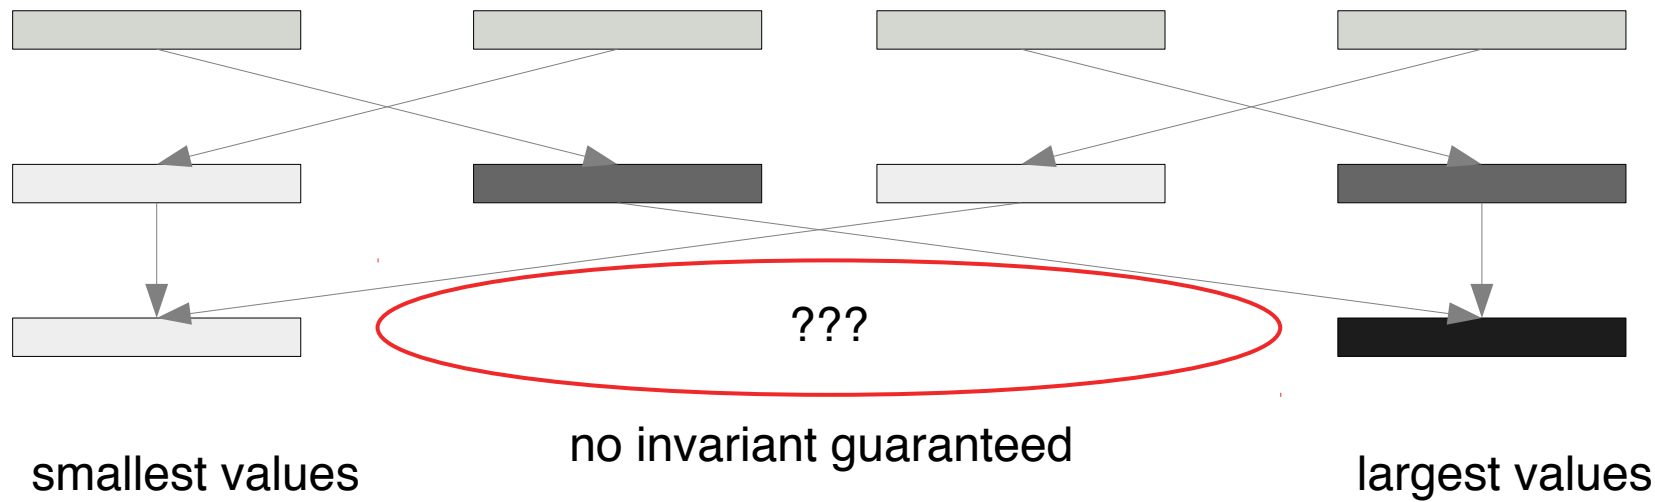

4 processes

Parallel Sort Using a Median: Hyperquicksort

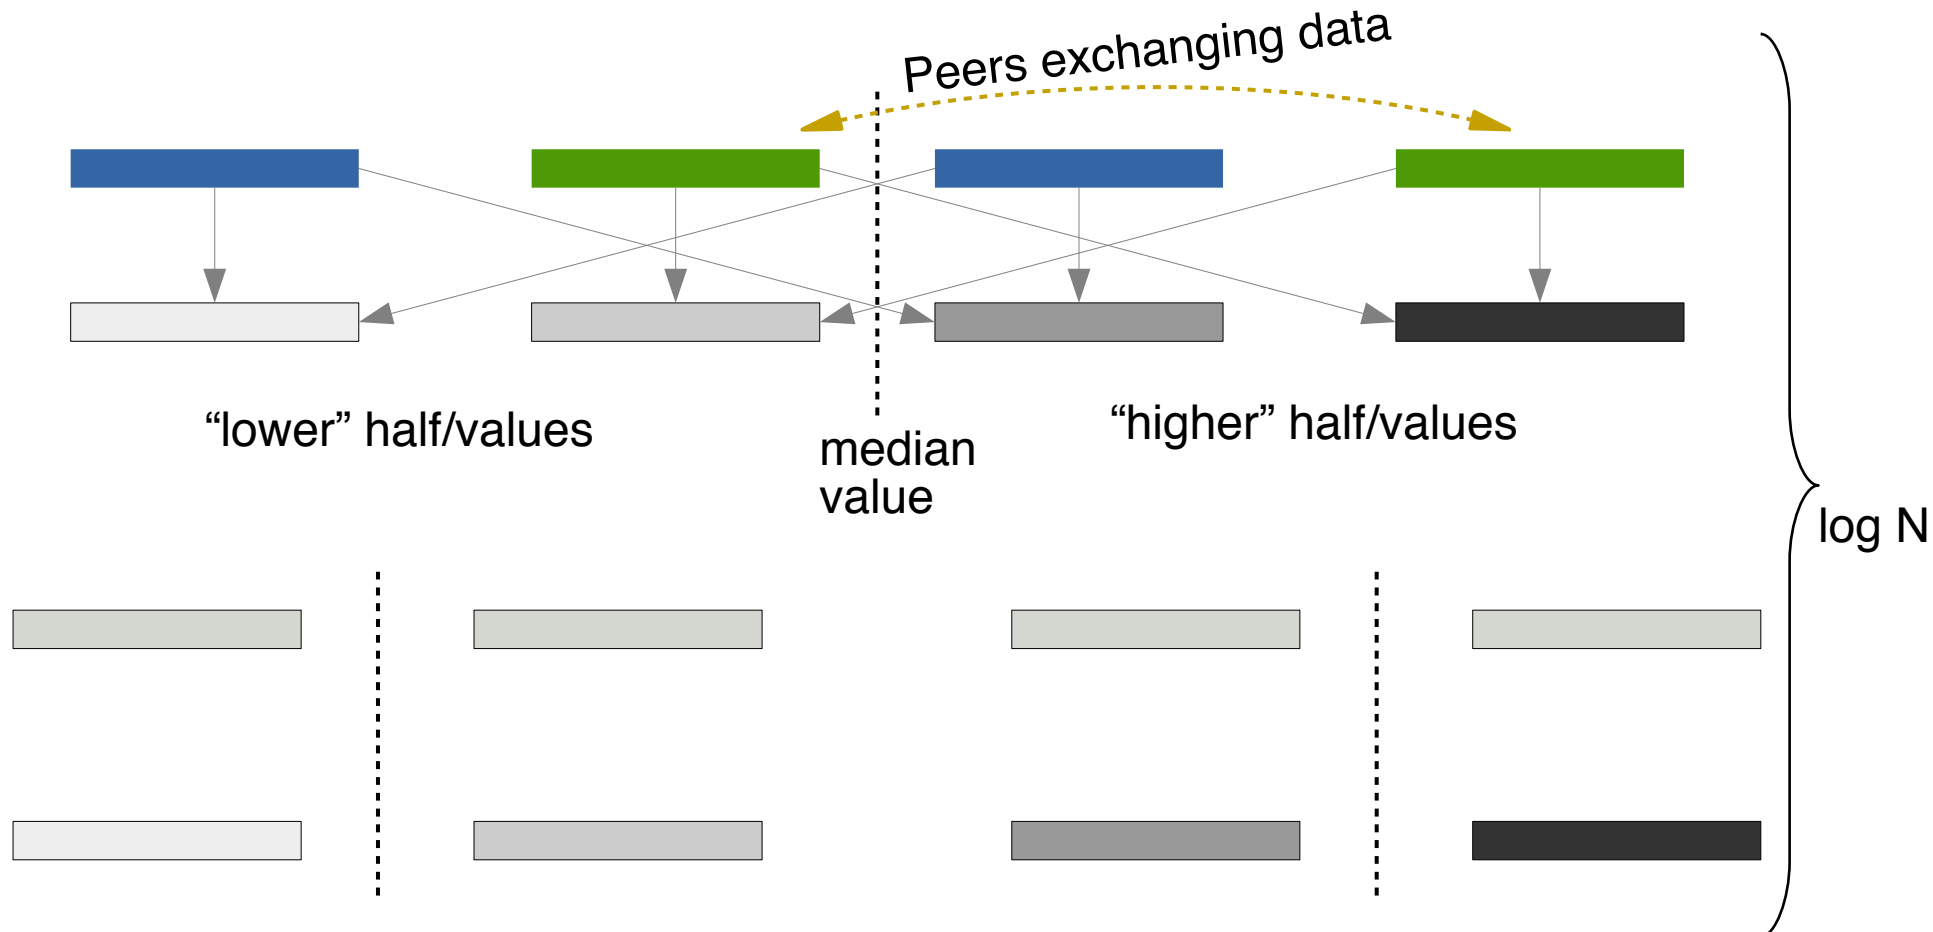

- How to select median?
 - Pick a process and value at random
 - Sort values locally and pick a local median
 - Global communication required for better median
- Keep the local values sorted
 - Initial cost: $\Theta(N/P \log N/P)$
 - Merge local old values with global new values: $\Theta(N/P)$

Divisibility, Network, and Median Selection

- Ideally
 - N is power of 2
 - Good load balancing
 - P is power of 2
 - Easy to find partner processor at each recursion level
 - Network is a hypercube
- Median selection
 - Local median is easy to find
 - Local values are kept sorted
 - Local median is usually not a global one
 - Imagine data that is already sorted
 - Bad median will create a load imbalance
 - Local data is no longer power of 2

